

TO: ALL REGENCY COMMUNICATIONS PROFESSIONAL SALES AND SERVICE CENTERS  
ALL REGENCY COMMUNICATIONS PROFESSIONAL SALES REPRESENTATIVES

MODELS AFFECTED: MCE 21/24 WITH REPEATER TALK-AROUND AND WITH  
OPTIONS MA-130 TIME-OUT TIMER OR MA-163  
AUDIO PA


**INSTALLATION:**

If the Main Board option is not connected (no repeater talk-around or simplex radio operation) the installation instructions given in the option service manual should be followed. The instructions for installing MA-130 or MA-163 (or any option requiring C6) in the MCE 21/24 change when the Main Board Option or the Simplex Conversion Option (MA-359) are also installed. Use the attached wiring diagram to connect the C6 and C5 pins on the Time-Out Timer Option. Keep in mind that the Main Board option pins are not the same as radio pins (unless the jumpers are connected) and that options are connected only to the radio. Install the remaining jumper wires as described in the appropriate option manual.

TECHNICAL SERVICE DEPARTMENT  
REGENCY COMMUNICATIONS, INC.



CONNECTION OF MA-130 IN MCE 21/24 WITH MAIN BOARD  
OPTION AND SIMPLEX CONVERSION (MA-359) ALSO  
CONNECTED(REPEATER TALK-AROUND).

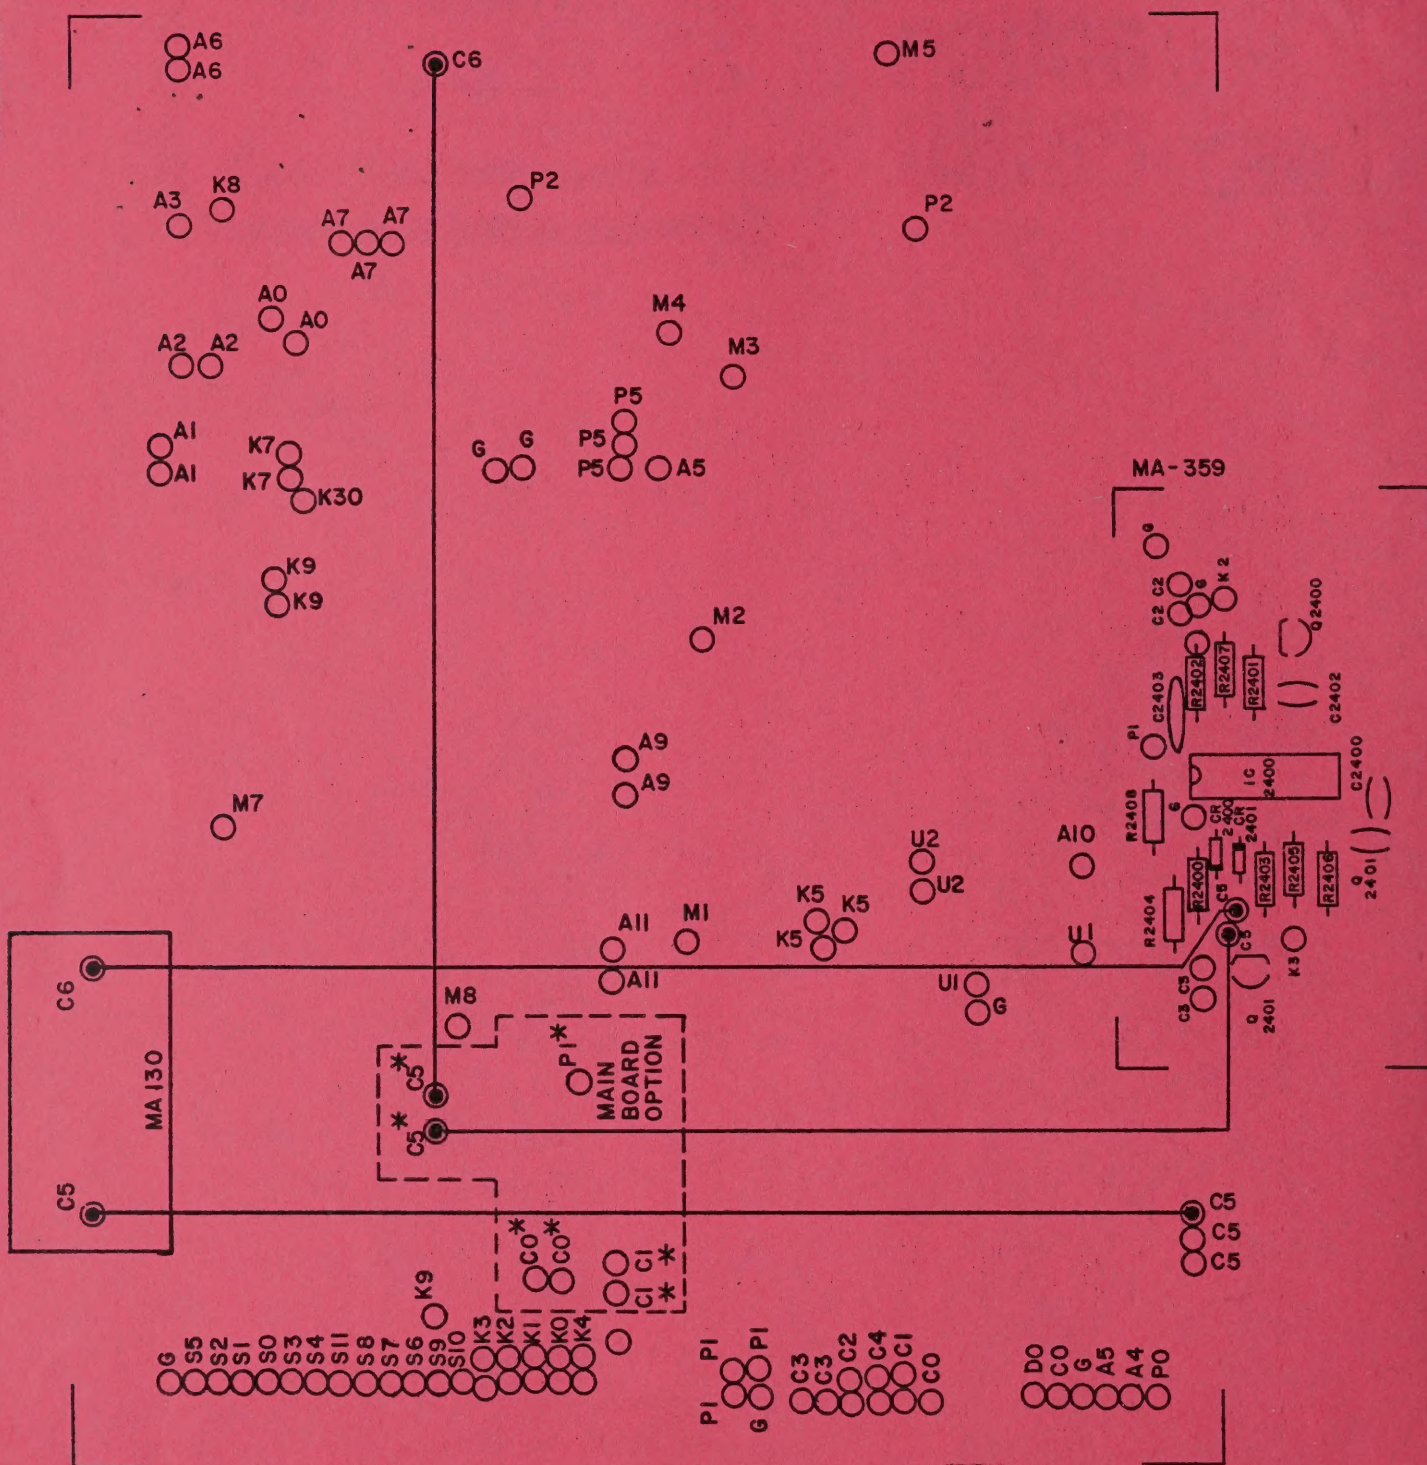

\* THESE OPTION TIE POINTS ARE TO BE USED ONLY IN THE INSTALLATION  
OF THE MAIN BOARD SIMPLEX CONVERSION OPTION FOR THESE ARE  
CONNECTIONS FROM THE OPTION TO THE RADIO.